

# Determination of the Effects of the Pre-Outfitting and Pre-Piping Assembly Operations on Shipyard Productivity

**Murat Ozkok**, Assist. Prof.

Karadeniz Technical University, Turkey

**I. Hakki Helvacioğlu**, Assoc. Prof.

Istanbul Technical University, Turkey

## ABSTRACT

*The process improvement operations are very significant in shipbuilding industry as the other industries. In recent years, the shipyards attempt to improve their processes by examining their current production system and to reduce the cycle time of the interim product so that they can keep their competitive power. If the cycle time of the interim products is decrease, that may cause to increase the annual production capacity and market share of the shipyard. In order to do this, the shipyards have to analyse their own production system and carry out some improvements on it. In this study, the effects of carrying out the outfitting and piping assembly operations in earlier work stations were investigated by using a methodology presented here. The steps in the methodology were applied to a double bottom block of a container ship. It was shown that if the outfitting and the piping assembly operations are carried out in earlier stations instead of the block assembly station, this may increase the throughput by 33%. The results of the study were discussed in the final section.*

**Key words:** Pre-outfitting assembly; pre-piping assembly; simulation; ship production

## INTRODUCTION

Shipbuilding is a global industry competing in the world extent [1]. In recent years, the shipyards attempt to improve their production processes in order to yield advantages against their competitors by manufacturing the ship as soon as possible. Geoje Samsung Shipyard is able to manufacture 40 ships per year in South Korea and it is also known as one of the most efficient shipyards in the world [2]. As compared with the other shipyards, Samsung shipyard has a great competitive advantage against its competitors. So, the point is that the shipyards have to investigate their production system and do some improvements in order to keep the competitive power.

One of the latest trend in manufacturing process is to reduce the cycle time of the product. In order to reduce the cycle time, it is needed to make process improvements on the current production system. Eker [3] reported some improvement suggestions with regard to the processes in the painting shops of the Sedef Shipyard and Schalekamp Shipyard. In the study [4], the format of the design drawings coming from design department was changed and the cutting process was carried out in shorter time and in more effective way. The process improvement operations was also applied on the scaffold area and material stock area [5] and the layout of the work stations [6] and [7]. In Todd Pacific Shipyard, as a result of improvement process, the moving distances of the forklifts were shortened in the rate of 50% and the oil wastes occurring during the operations of the forklifts were also reduced [8]. As can be seen

from the above works, the process improvement applications are able to be applied in many fields in shipyard.

The effects of the improvements on the production system can be seen by simulation. Simulation has a great importance for the production companies. In the competition environment, the changes on the production system and the effects of these changes are very significant in terms of the company performance. Simulation has been applied in many industry for years as it provides a great advantage for the planner. In shipbuilding industry, it has a great deal of application fields such as layout, production processes and so on. In the study that has been still going on by Michigan University and Seoul University, it is aimed to simulate all the activities in shipyard and to see the effects of the changes on the production system [9]. In the other study, the stations forming the sub assembly line were modelled by using simulation and after the system was simulated, a robot was settled in the production line and the rate of productivity was determined [10]. Shin [11] aimed to settle the work stations of the shipyard in the optimum way. That's a layout application of simulation. Alkaner [12] considered a profile cutting station and the processes of the profile cutting station were determined. Then, these processes were modelled in a simulation program and the effects of changing the resources were investigated. In the study [13], the panel production station was considered as a bottleneck station. Processes were determined and modelled in simulation program. Then, by doing some changes on the processes, the completion time of the panel cutting station was tried to be

optimized. In this study, Arena simulation program [14] was used for modelling the work flows between stations as the modules of it are very appropriate for modelling the production activities. The activities can also be modelled easily by using the modules.

In many shipyards in Turkey, the whole assembly operations with regard to outfitting and piping are carried out in the block assembly area. In the block assembly area, after the steel assembly operations of the block are over, the outfitting and piping assembly operations are carried out. Therefore, the work load of the block assembly area is very high and this may cause to a new bottleneck in the production system. In this study, the outfitting and piping assembly operations of the block will be carried out in earlier work stations and some changes will be applied on the current production line. As a result, the effects of all these changes on the current production system will be determined. The phases of the methodology are followed one by one and the effects of the pre-outfitting and pre-piping activities on the entire production system are seen.

In literature, the papers with regard to pre-outfitting are very limited. In the papers, the modular outfitting concept is mentioned. Fafandjel [15] mentioned that the ship is manufactured in shorter time by using modular outfitting concept. Yu and Ishida [16] searched how to determine the effectiveness of the modular outfitting concept. Baade et al. [17] mentioned the advantages of the modular outfitting in his paper.

## METHODOLOGY

Fig. 1 presented the methodology implemented in this study. The methodology consists of nine steps. In the first step of the model, the product, which is produced in shipyard production line, is defined. Then, the workstations, that are involved in product fabrication, are described. In the step 3, detailed process analysis of current production system is performed. After comprehensive process analysis, simulation model of the current production system is modelled in ARENA simulation software (in step 4). In step 5, simulation model is run along a specific period and production quantity (throughput) of the production system is achieved. Then, some suggestions on current production system are made in step 6. After that, these suggestions are applied on current simulation model in step 7 and the new production case is obtained. In step 8, the effects of the changes are discussed and evaluated. Finally, in the last step (step 9), comparison of the current and new production cases is performed.


## APPLICATION

### *Defining of product (Step 1)*

Ships are fabricated in blocks which constitute ship structure. There are various sort of blocks such as bow, aft, side, bulkhead and double bottom block. In this study, a double bottom block of a container ship is illustrated as an example. Double bottom block is one of the main interim products in shipbuilding. The reason of considering the double bottom block in this study is that almost all of the work stations are involved in its production activities.

As the structure of a double bottom block is examined, it can be seen that it has different production phases, which are called as production stages. Table 1 shows these production stages and the structures representing these production stages.

A double bottom block is built by coming together the production stages mentioned in Tab. 1. In the first phase of the

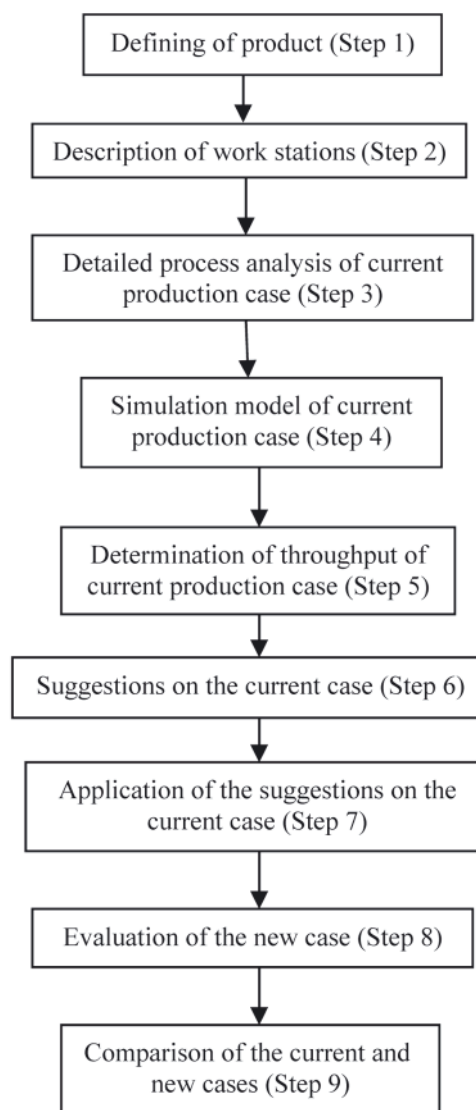

*Fig. 1. Application steps of the study*









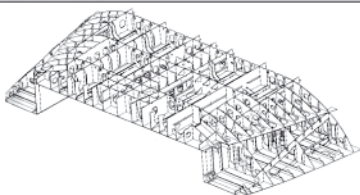
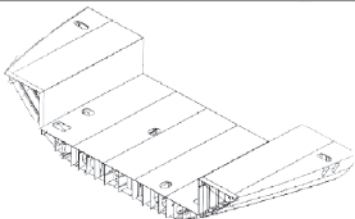
double bottom production, single section parts (A) and single plate parts (B) are fabricated. These parts are cut from the plates and profiles which have standard-dimensions and they have specific dimensions after cutting process. Then, they are fitted and minor assembly is built (C). Two or more minor assemblies constitute sub assembly (D). Flat plates are sub-merged welded and flat plate assembly (E) is fabricated. When the profiles are fillet welded on flat plate assembly, the flat plane assembly (F) is built. Minor and sub assemblies are welded on the flat plane assembly (F) and major sub assembly (G) is manufactured. Curved panel assembly (H) is manufactured on pin jigs. In block assembly area, sub unit assembly (J) and curved panel assembly are mounted and welded, finally a double bottom block (K) is built.

There are also some outfitting equipments in double bottom block just like manholes, bottom plugs, zinc, vertical ladder and doubling plates. These outfitting equipments are mounted into block structure's body. Tab. 2 shows these outfitting materials.

### *Descriptions of work stations (Step 2)*

Ship production is extremely hard job since it includes a great deal of process. A ship is manufactured by performing thousands of work activities. In order to manufacture a ship, various types of workstations are needed. Every workstation

Tab. 1. Production stages of a double bottom block and structures






Production Stage	Definitions of production stages	Structures representing production stage
A	Single section part	
B	Single plate part	
C	Minor assembly	
D	Sub assembly	
E	Flat plate assembly	
F	Flat panel assembly	
G	Major sub assembly	
H	Curved panel assembly	
J	Sub unit assembly	
K	Unit assembly	

has a task for ship production. Tab. 3 shows the work stations which have function in double bottom block production.

In edge cutting station (I1), the edge cutting operation of ship hull plates is carried out. Edge cutting operation is the contour cutting of flat plates. And the plates which are subject to edge cutting constitute the panel structure. The edge cleaning operation of the ship hull plates, which are cut in edge cutting station (I1), is carried out in edge cleaning and sequencing

station (I2). There are some materials and slags on the edge surfaces of the plates after edge cutting. Using a grinding machine, these materials and slags remove from the edge surfaces of the plates. In I2 station, the plates are also sequenced in accordance with the process turn. The hull plates are welded and the panel structure is produced in panel production station (I3). In panel cutting station (I4), the panel which is manufactured in panel production station (I3) is subject to

Tab. 2. Outfitting materials used in double bottom block

Outfitting name	Outfitting structure
Manhole	
Bottom plug	
Zinc	
Vertical ladder	
Doubling plates	

Tab. 3. The work stations in the production process of the double bottom block

Station no	Station name
I1	Edge cutting
I2	Edge cleaning and sequencing
I3	Panel production
I4	Panel cutting
I5	Profile spot welding
I6	Profile TIG welding
I7	Section spot welding
I8	Section TIG welding
I9	Grinding
I10	Profile cutting
I11	Profile bending
I12	Nest cutting
I13	Pre-fabrication
I14	Jig
I15	Plate bending (Press)
I16	Block assembly

counter cutting in accordance with its dimensions. The profiles are assembled on the panel by spot welding in profile spot welding station (I5). The profiles are welded by TIG welding in profile TIG welding station (I6). The minor and sub assemblies are joined on the flat panel assembly by spot welding in section spot welding station (I7). The minor and sub assemblies are welded on the flat panel assembly by TIG welding in section TIG welding station (I8). Grinding station (I9) is the last station of the panel line. In this station, the grinding operations of the flat panel and major sub assemblies are performed. The cutting operations of the profiles are performed in profile cutting station (I10). Standard-dimensioned profiles, which are sent

to profile cutting station, are cut with specific dimensioned profiles. The bending operations of the profiles are performed by box machine in profile bending station (I11). The bending profiles are used in curved panel. Nest cutting station (I12) is the heart of the shipyard production system. In this station, single plate assemblies are manufactured. Minor and sub assemblies are produced in pre-fabrication station (I13). Curved panel assemblies are produced in jig station (I14). Jig structure consists of curved jigs. The curved panels are lied down the jig structure and the curved profiles are welded on this curved plates. In plate bending station (I15), the bending operations of the plates, coming from nest cutting station, are performed. Therefore, the flat plates are transformed to the curved plates. The structures and parts produced in previous work stations are sent to block assembly station (I16) and the block structure is formed by assembling the corresponding parts. Fig.2 shows the work flows between work stations.

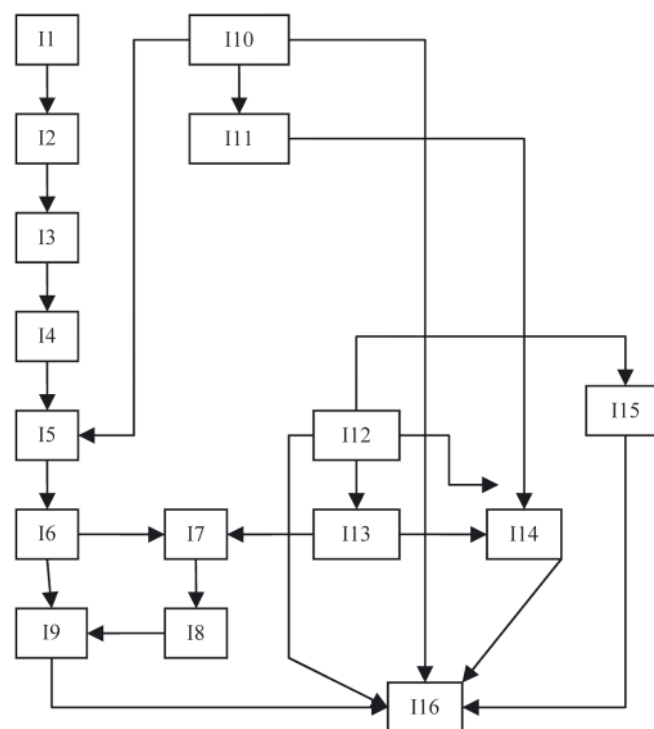


Fig. 2. Work flow in the shipyard production system

### Detailed process analysis of current production case (Step 3)

In this step, the comprehensive process analysis of the work stations are carried out. Every work station has a considerable number of work activities. At the beginning of the detailed process analysis, the work activities are determined and then the durations of each work activity are achieved. Because there are over 2500 work activities, the process analysis of only panel production and panel cutting stations are presented here.

#### Process analysis of panel production station (I3)

In panel production station, panel structure is fabricated by submerged arc welding. Fig. 3 shows the general arrangement of the panel production station. In the first step, the plates are fixed to panel line by using conveyor fixing mechanism. Then, they are sent to tolerance plate's welding area where the tolerance plates are welded with tack welding. Submerged arc welding operation starts from the tolerance plates because the welding becomes more stabilized. After that, the plates are transferred to submerged arc welding machine with conveyor.



Tab. 4. Detailed process analysis of panel production station (I3)

Activity no.	Activity description	Repetition number of activity	Activity duration (min.)
1	The overhead crane goes to the flat plate to be transported	11	4.125
2	The overhead crane comes down to the flat plate surface	12	5.746
3	The overhead crane holds the flat plate	12	1.997
4	The overhead crane lifts the flat plate	12	5.746
5	The overhead crane transports the flat plate	12	4.5
6	The overhead crane takes down the flat plate	12	5.4
7	The overhead crane leaves the flat plate surface	12	0.996
8	The overhead crane goes up the flat plate surface	12	5.4
9	The operator walks to the start point of the conveyor line	11	2.2
10	The worker walks to the conveyor line plate fixed mechanism.	12	0.864
11	The operator fixes the plate on the conveyor line	12	3.996
12	The worker runs the conveyor line	46	3.818
13	The operator walks to the welding tolerance plates	20	1.1
14	The conveyor transports the plate to the tolerance plate welding area	12	1.042
15	The alignment of the plate on the tolerance plate welding area	8	1.307
16	The operator brings the tolerance plates to the flat plate	20	1.1
17	The operator puts the tolerance plates near the corners of the flat plates	40	5.32
18	The worker walks to spot welding machine	2	0.086
19	The worker runs the spot welding machine	2	0.166
20	The operator sets up the spot welding machine	50	8.32
21	The operator fixes the tolerance plates on the corners of the flat plates with spot welding	40	38
22	The operator walks to the other corner of the flat plate	20	3.46
23	The operator goes to the TIG welding machine	22	2.066
24	The conveyor transports the flat plate to the TIG welding area	12	1.414
25	The worker walks to the TIG welding machine in order to check the position of the flat plate	12	1.536
26	The worker checks out the position of the flat plate	12	18
27	The operator runs the TIG welding machine	12	16.992
28	The flat plate is fixed to the TIG welding machine with clamps	12	9
29	The worker checks out whether the plate is fixed on the TIG welding machine conveniently or not.	12	60
30	The worker brings the spot welding machine near the TIG welding machine	10	0.72
31	The operator comes down to the plates for spot welding	10	0.53
32	The spot welding operation of the plates prior to TIG welding	10	115.358
33	The worker goes to the torches of the TIG welding machine	10	0.32
34	The operator sets up the TIG welding machine before TIG welding process.	10	41.664
35	TIG welding of the plates	10	272.19
36	The conveyor transports the panel outside the TIG welding station.	10	1.728

Here, the plates are welded with submerged arc welding and they are then sent to buffer area. As a result, flat plate assembly (production stage E) is fabricated. Table 4 illustrates the detailed process analysis in panel production station.

#### Process analysis of panel cutting station (I4)

Counter cutting of the panel is performed in this station. Fig. 4 shows general arrangement of panel cutting station. The

panel fabricated in I3 gets to Buffer Area 2. Then, the panel is transferred to panel cutting machine with conveyor. Panel cutting machine performs counter cutting operation. But, before this, blasting operation is fulfilled. Then, automatic marking operation is done. Therefore, the alignments of the piece parts can be easily performed. After that, the counter cutting operation is carried out. Finally, the panel is transferred to Buffer Area 1. Detailed process analysis of panel cutting station is illustrated in Table 5.

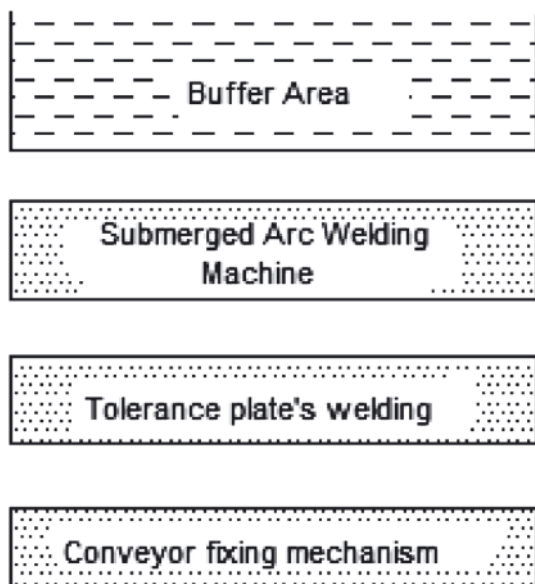


Fig. 3. General arrangement of panel production station (13)

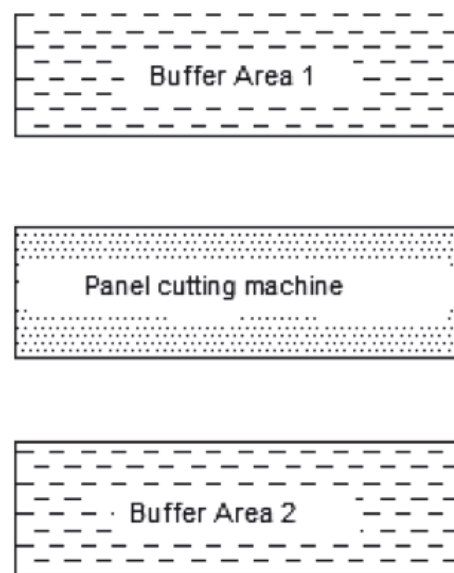


Fig. 4. General arrangement of panel cutting station (14)

Tab. 5. The process analysis of panel cutting station (14)

Activity no.	Activity description	Repetition number of activity	Activity duration (min.)
1	The operator transports the panel to the panel cutting station	2	1.334
2	The operator goes to bring the cutting program CD	2	2
3	The operator takes the cutting program CD	2	1
4	The operator goes back the cutting station with CD	2	2
5	The operator loads the Program CD to the cutting machine	2	2
6	The cutting machine moves on the counter line of the panel	2	7.811
7	The cutting machine signs the reference points on the panel	2	3.906
8	The cutting machine loads the reference points on itself.	2	2
9	The operator runs the panel cutting machine	2	0.5
10	Blasting and marking processes	2	139.937
11	Cutting process	2	101.457
12	The worker takes the marking pen	2	2
13	Manuel marking process	2	17.583
14	Taking the outfitting parts and bringing them to the cutting station.	12	3
15	The workers put the outfitting parts on the panel.	12	9
16	The worker runs the spot welding machine	12	1.992
17	Spot welding process	12	15.83
18	The worker runs the grinding machine	12	1.992
19	Grinding process after the spot welding process	6	7.334
20	The worker runs the TIG welding machine	6	1.992
21	TIG welding process	6	126.48
22	Grinding process after the TIG welding process	6	7.49
23	The conveyor transports the panel outside the panel cutting station	2	1.066

In the same way, the detailed process analysis is performed for the other work stations. Because there are over 2500 work activities, it is impossible to present here. After the work activities and their durations are determined, the completion times of the work stations are calculated by considering the serial and parallel work activities. In Table 6, the completion times of the work stations are given. For instance, the process time of edge cutting station is 190 minutes. In other words, the edge cutting process of the plates, which constitute the panel of the double bottom block, takes 190 minutes.

Tab. 6. Station completion times of the current case

Station name	Completion time (min.)
Edge cutting	190
Edge cleaning and sequencing	203
Panel production	622
Panel cutting	356
Profile spot welding	380
Profile TIG welding	414
Section spot welding	501
Section TIG welding	660
Grinding	99
Profile cutting	410
Profile bending	350
Nest cutting	653
Pre-fabrication1	448
Pre-fabrication2	632
Jig	1522
Plate bending (Press)	1317
Block assembly	2196

**Simulation model of current production case (Step 4)**

In this step, simulation model of the current production system is created. Fig. 5 depicts the simulation model of the current case and Tab. 7 shows the modules which are used in simulation model.

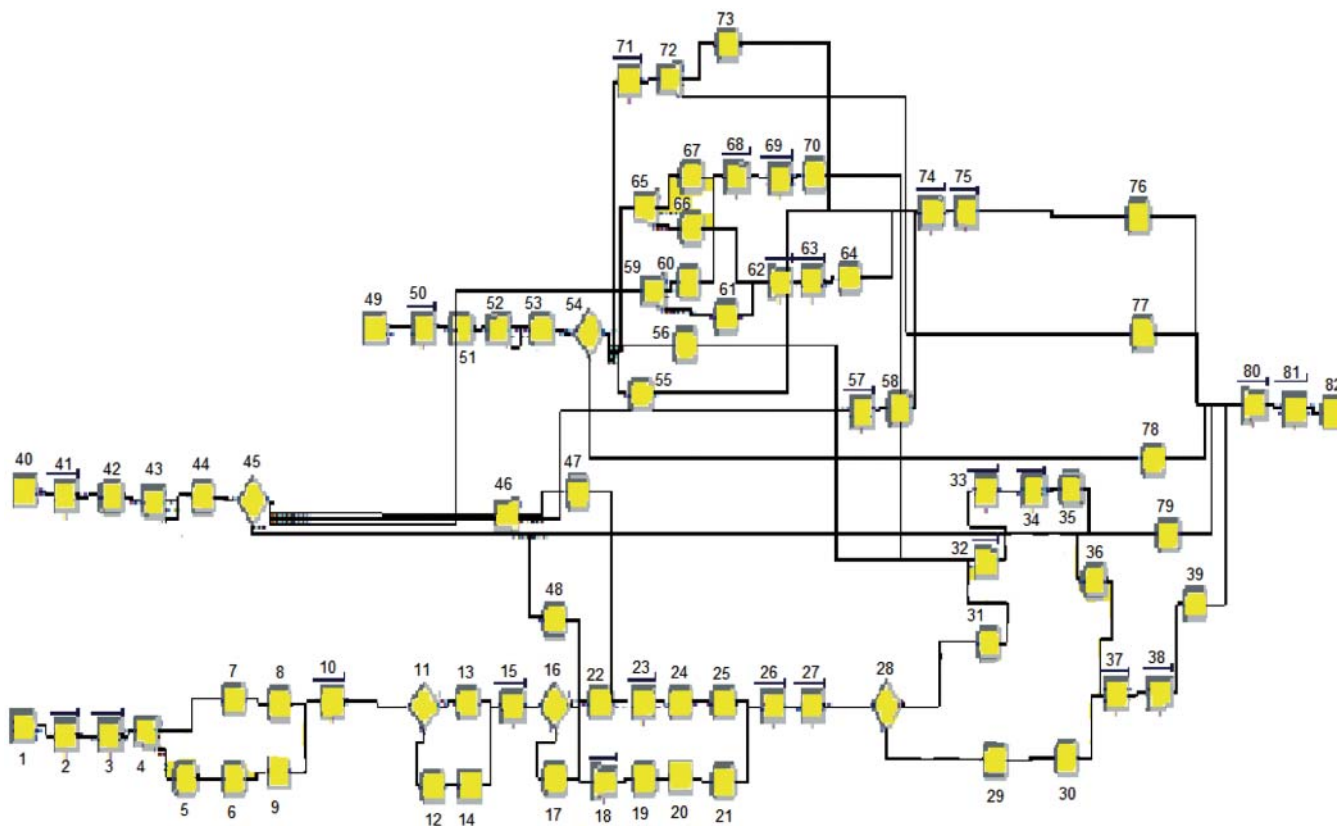


Fig. 5. Simulation model of the current case

Tab. 7. Definition of module numbers

Module no.	Module name	Module no.	Module name	Module no.	Module name
1	Create1	29	Assign13	57	Process of profile bending (I11 station)
2	Process of plate edge cutting (I1 station)	30	Assign14	58	Assign 27
3	Process of plate edge cleaning	31	Assign15	59	Separate 5
4	Separate1	32	Batch3	60	Assign 28
5	Assign1	33	Process of section spot welding(I7 station)	61	Assign 29
6	Assign2	34	Process of section TIG welding (I8 station)	62	Batch 5
7	Assign3	35	Assign16	63	Process of pre-fabrication1
8	Assign4	36	Assign17	64	Assign 30
9	Delay1	37	Process of grinding (I9 station)	65	Separate 6
10	Process of panel production (I3 station)	38	Batch4	66	Assign 31
11	Decide1	39	Assign18	67	Assign 32
12	Assign5	40	Create2	68	Batch 6
13	Assign6	41	Process of profile cutting (I11 station)	69	Process of pre-fabrication1
14	Delay2	42	Assign19	70	Assign 33
15	Process of panel cutting (I4 station)	43	Separate 2	71	Process of plate bending (I15 station)
16	Decide2	44	Assign20	72	Separate 7
17	Assign7	45	Decide4	73	Assign 34
18	Batch1	46	Separate 3	74	Batch 7
19	Assign8	47	Assign 21	75	Process of jig (I14 station)
20	Delay3	48	Assign 22	76	Assign 35
21	Assign9	49	Create 3	77	Assign 36
22	Assign10	50	Process of nest cutting (I12 station)	78	Assign 37
23	Batch2	51	Assign 23	79	Assign 38
24	Assign11	52	Separate 4	80	Batch 8
25	Assign12	53	Assign 24	81	Process of block assembling (I16 station)
26	Process of profile spot welding (I5 station)	54	Decide 5	82	Dispose
27	Process of profile TIG welding (I6 station)	55	Assign 25		
28	Decide3	56	Assign 26		

In ARENA simulation model, various modules are employed to create the simulation model of the production system. Tab. 8 represents the modules and their definitions.



Tab. 8. Description of modules

Module name	Description
Create	Describes the arrival time and quantity of the materials entering into the production system
Process	Describes the work stations in the production system
Assign	Makes assignments the products leaving any work station and it is also used in assembly operations
Decide	This module orients the products to the work stations where they will go to
Batch	Used in assembly operations. It combines the products for assembly operation
Separate	Divides the main product into sub products. It is usually used for cutting operations
Dispose	Shows the exit of the production system

### ***Determination of throughput of current production case (Step 5)***

After the simulation model is created, the model is run along 720 hours. The current case has a capacity of producing 18 double bottom blocks at the end of the operation time of 720 hours. In other words, the current case can produce a double bottom block in 2400 minutes.

### ***Suggestions on the current case (Step 6)***

In the current production line, the assemblies of the outfitting and piping are carried out in the block assembly station. After the completion of the steel works, the outfitting assembly and then the piping assembly are carried out. Therefore, all these operations are done in serial way, which means more work load and longer lead times. If we can carry out the outfitting and piping operations in earlier work stations and distribute the work load, we can reduce the work load and the completion time of the block assembly station. By doing this, the waiting time in front of the block assembly area is lowered and the lead time of the double bottom block may be shorter. Tab. 9 depicts the suggestions on the current case.

Tab. 9. The suggestions on the current case

No. of suggestions	Workstation	Description of suggestions
1	Panel cutting	The welding operations of the manholes on tanktop panel were carried out. These welding operations are one side welding. In this way, the one side welding operations of the manholes will be finished
2	Panel cutting	The one side welding operations of the bottom plugs (two pieces) on hull panel
3	Panel cutting	The welding operations of the zincs (six pieces) on hull panel were carried out and finished
4	Pre-fabrication	The assemblies of vertical ladders (three pieces) were carried out on the sections
5	Pre-fabrication	The assemblies of the zincs (thirty-two pieces) were carried out
6	Pre-fabrication	Assemblies of pipe systems (twenty-six) on the module
7	Pre-fabrication	Manufacturing the module in pre-fabrication station (I13) in order to assemble the piping systems
8	Jig	Assembly of pipe systems (nine) on the curved panel assembly in jig station
9	Block assembly	Assembly of one vertical ladder when the block is upside down
10	Block assembly	Completing of the welding operations of two bottom plugs when the block is upside down
11	Block assembly	Completing of the welding operations of four manholes when the block is in flat position
12	Block assembly	Assembly of twenty doubling plates when the block is in flat position
13	Block assembly	Assembly of two bilge wells when the block is in flat position
14	Block assembly	Assembly of four zincs when the block is in flat position
15	Block assembly	Carrying out the outfitting and steel operations in parallel way in the block assembly station
16	Block assembly	In the block assembly station (I16), in the steel operations, there are fourteen TIG welding and spot welding workers in the current case. In the new case, the quantity of the TIG welding and spot welding workers are sixteen for steel operations. The TIG welding and spot welding operations are carried out by the same workers. And also, two spot welding and TIG welding machines which are on idle are added to the station

### Application of the suggestions on the current case (Step 7)

In this phase, the suggestions given in Step 6 are applied in the current simulation model in Fig. 5. Panel cutting, section spot welding, pre-fabrication, jig and block assembly stations were influenced by the suggestions on the current case and the completion times of these work stations are calculated again. Table 10 shows the completion times of each work stations in new case.

Tab. 10. Station completion times of the new case

Station name	Completion time (min.)
Edge cutting	190
Edge cleaning and sequencing	203
Panel production	622
Panel cutting	460
Profile spot welding	380
Profile TIG welding	414
Section spot welding	284
Section TIG welding	660
Grinding	99
Profile cutting	410
Profile bending	350
Nest cutting	653
Pre-fabrication1	621
Pre-fabrication2	632
Jig	1634
Plate bending (Press)	1317
Block assembly	1073

### Evaluation of the new case (Step 8)

In the evaluation of the new case, Arena simulation program will be used. The new case manufactures 24 double bottom blocks at the end of 720 hours. That means the new case can produce a double bottom block in 1800 minutes.

### Comparison of the current and new cases (Step 9)

Fig. 6 shows the quantity of the double bottom block manufactured in both cases at the end of 720 hours. While the current case produces 18 double bottom blocks, the new case produces 24 double bottom blocks.

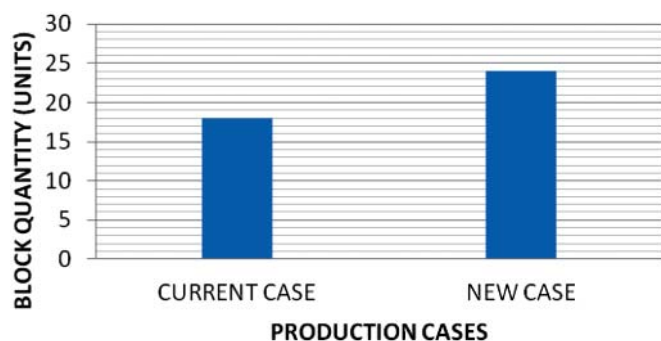


Fig. 6. Block quantity manufactured in the current and new cases

Fig. 7 shows the cycle times of the double bottom block for both cases. While a double bottom block is produced in 2400 minutes in the current case, in the new case, a double bottom block is produced in 1800 minutes.

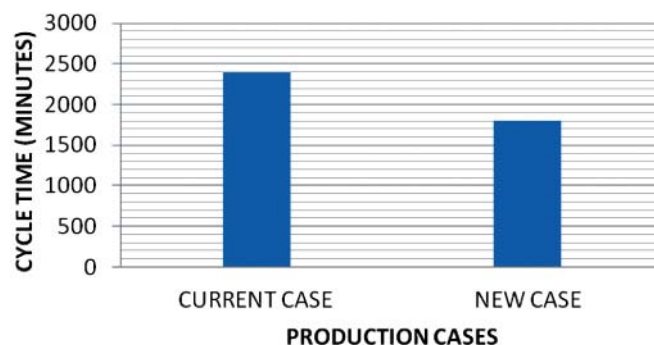


Fig. 7. Cycle times of the double bottom block for the current and new cases

It should be noted here that, no extra expenditures are paid during the transition from the current case to the new case. All the changes on the current case were performed by using the possibilities of the shipyards without purchasing any workers or equipments. Table 11 presents the need of additional equipment and manpower.

Tab. 11. Need of resources after changing

Suggestion no.	Work Station	Additional equipment	Additional manpower
1	Panel cutting	No need	No need
2	Panel cutting	No need	No need
3	Panel cutting	No need	No need
4	Pre-fabrication	No need	No need
5	Pre-fabrication	No need	No need
6	Pre-fabrication	No need	No need
7	Pre-fabrication	No need	No need
8	Jig	No need	No need
9	Block assembly	No need	No need
10	Block assembly	No need	No need
11	Block assembly	No need	No need
12	Block assembly	No need	No need
13	Block assembly	No need	No need
14	Block assembly	No need	No need
15	Block assembly	No need	No need
16	Block assembly	No need	No need

## CONCLUSIONS

In this study, some improvement suggestions with regard to outfitting and piping assembly operations were carried out on the shipyard production system. The improvements were applied on the block assembly station that was a bottleneck. The main changes on the current case were the pre-outfitting assembly operations and pre-piping assembly operations. According to simulation work, in the current case, the system can manufacture 18 blocks at the end of 720 hours. After the changes were applied on the current case, the new production case can produce 24 blocks at the end of 720 hours. So, the changes on the current case provide an improvement rate of 33% without additional expenditure. In other words, when the assembly operations of the outfitting and piping are carried

out in earlier work stations, the throughput increases. The pre-outfitting and pre-piping assembly operations provide less cycle time. The authors strongly recommend the shipyards to perform outfitting and piping assembly operations in earlier stations instead of block assembly area since the cycle time of the block is considerably decreased.

## BIBLIOGRAPHY

1. Frankel E.G.: *Impact of technological change on shipbuilding productivity*, Journal of Ship Production, 1, 3, 174-183, 1985.
2. Inozu B., et al.: *New horizons for shipbuilding process improvement*, Journal of Ship Production, 22, 2, 87-98, 2006.
3. Eker E.: *The application of the process improvement concept on the paint works*, MSc Thesis, ITU Institute of Science, Istanbul, 1999.
4. Hardwick M., Kassel B., Crump B. and Garret S.: *Improving shipyard manufacturing processes using STEP-NC*, Journal of Ship Production, 21, 3, 170-176, 2005.
5. DiBarra C.: *5S-A tool for culture change in shipyards*, Journal of Ship Production, 18, 3, 143-151, 2002.
6. Odabasi A.Y., Alkaner S., Olcer A. and Sukas N.: *Reengineering of small and medium-sized ship production facilities: An example for Turkish Shipbuilding industry*, Journal of Ship Production, 13, 1, 8-15, 1997.
7. Odabasi A.Y., et al.: *Development and evaluation of Marmara Shipyard's expansion program*, Contract Report, Istanbul, 1993.
8. Larson T., and Tice J.: *Lean and EMS Integration Workshop*, Environmental Technologies, Ship Production Panels, USA, 2005.
9. Lamb T.: *Simulation-based performance improvement for shipbuilding processes*, Journal of Ship Production, Vol. 22, No. 2, May, pp.49-65, 2006.
10. Shin J.G.: *A modeling and simulation of production process in subassembly lines at a shipyard*, Journal of Ship Production, Vol.20, No.2, May, pp.79-83, 2004.
11. Shin J.G.: *A concept and framework for a shipyard layout design based on simulation*, Journal of Ship Production, Vol.25, No.3, August, pp.126-135, 2009.
12. Alkaner S.: *The Modelling and Analysis of Ship Production with Simulation: Case Study*, PhD Thesis, ITU Institute of Science, Istanbul, 1998.
13. Greenwood A.G., Hill H.W.: *Simulation Optimization Decision Support System for Ship Panel Shop Operations*, Proceedings of the 2005 Winter Simulation Conference, pp. 2078-2086, 2005.
14. Kelton W.D., Sadowski R.P. and Sturrock D.T.: *Simulation with Arena*, Third edition, McGraw-Hill, 1998.
15. Fafandjel N., et al.: *Procedure for measuring shipbuilding process optimization results after using modular outfitting concept*, Urednistvo Casopisa Strojartvo, 50, 3, 141-150, 2008.
16. Yu H. and Ishida K.: *The evaluation of the effectiveness of modular outfitting of engine room machines*, Fourth International Conference on Marine Technology, 23-25 May, Poland, 391-399, 2001.
17. Baade R., et al.: *Modular outfitting*, Journal of Ship Production, 14, 3, 170-179, 1998.

---

Murat Ozkok, Assist. Prof.  
Department of Naval Architecture and Marine Engineering,  
Karadeniz Technical University,  
61530 Camburnu/Trabzon, TURKEY  
Phone: +90 462 752 2805,  
Fax: +90 462 752 2158,  
e-mail: muratozkok@ktu.edu.tr

I. Hakki Helvacioğlu, Assoc. Prof.  
Faculty of Naval Architecture and Ocean Engineering,  
Istanbul Technical University,  
34469, Maslak/Istanbul, TURKEY  
Phone: +90 212 285 6391,  
Fax: +90 212 285 6454,  
e-mail: ismailh@itu.edu.tr