

LYAPUNOV FUNCTION BASED CRITERIA FOR SHIP ROLLING IN RANDOM BEAM SEAS

Erdem Üçer

Istanbul Technical University, Faculty of Naval Architecture and Ocean Engineering, Turkey

ABSTRACT

The aim of this study is to present a Lyapunov function which can be used to derive an intact stability criterion for a ship in random beam seas. First, the mathematical model of the rolling motion of ships in random beam seas is introduced. The random wave excitation is described by a spectrum which is depended on the wave energy spectrum and the amplitude of the moment of roll. This spectrum is generated by a second order linear filter. Second, the methodology of creating a Lyapunov function is explained briefly. Then, there is outlined the way by which Lyapunov function can be used as the intact stability criterion for a ship. The proposed criterion is derived by considering the weather criteria for German naval vessels. Finally, the coherence of the boundary of safe basin obtained by Lyapunov function with the numerical results obtained by Euler-Maruyama Method is presented. From the results it can be deduced that the Lyapunov function can be used to define an intact stability criterion.

Keywords: random beam sea, wave energy spectrum, Lyapunov function, intact stability criterion

INTRODUCTION

Modelling the dynamic behaviour of ships and offshore structures in their real working environment such as random seas and winds have always been a popular study subject since 1960s [3].

The earliest milestones on the investigation of ship rolling in random seas are the studies of Haddara [11], Odabasi [21] and Roberts [24].

Lyapunov Direct Method or Lyapunov functions [18, 25] are used since 1970s to determine the conditions of stability against capsizing of ships. The studies of Odabasi [21], Ozkan [22] and Caldeira-Sariava [4] are the earliest examples of the usage of Lyapunov functions to investigate the rolling motions of ships. The more recent studies are the studies of Yilmaz [29] and Ucer [28].

The form parameters of fishing ships are analyzed by Yilmaz [29] to establish a practical stability criterion in preliminary design stage.

In the study of Ucer [28], the transverse stability of BSRA trawlers are analyzed by using both numerical and analytical safe basin concepts and it is also demonstrated how the concept of safe basin can be utilized for the assessment of the stability of trawlers in regular beam seas.

The dynamic behaviour of elastic ocean structures of single degree of freedom is treated by an analytical approach based on the stochastic averaging of the energy envelope according to Moshchuk et al. [20]. The system is considered to be subject to a narrow-band random process modelled as the output of shaping filter. Three different shaping filters (first, second and fourth order) possessing Pierson-Moskowitz spectrum are employed to model Gaussian random sea waves.

The large-amplitude rolling and capsize dynamics of ships in random beam seas are investigated by using a nonlinear single-degree-of-freedom model by Jiang et al. [13]. In their work a criterion of capsizing is derived by using Melnikov function and phase-space transport techniques.

The general non-linear model of parametric excited roll motions in head or following random seas is derived in the study of Dostal and Kreuzer [9]. The irregular waves are modelled in terms of a continuous time autoregressive moving average process. The resulting model of stochastic differential equations is investigated numerically by local statistical linearization.

An analytical criterion is provided by Dostal et al. [10] for ship and sea state parameters, which indicates the large roll amplitudes or capsizing and determines the mean time to these events.

The subject of this study, the rolling motion of a ship in random beam seas is recently investigated by Chai et al. [5–8].

The stochastic roll response and reliability of a ship in random beam seas is studied by using a four-dimensional (4D) path integration (PI) approach in the studies of Chai et al. [5–8] where a 4D Markov dynamic system is established by combining the single-degree-of freedom model used to represent the ship rolling behaviour in random beam seas with a second-order linear filter used to approximate the stationary roll excitation moment.

In this study, firstly the roll motion in beam seas is represented by the mathematical model derived by Chai et al. [5–8]. Secondly, the methodology of constructing a Lyapunov function of randomly exerted system is outlined. Then, it is presented how that Lyapunov function can be used as a tool for intact stability criterion similar to the weather criteria for German naval vessels [2]. Finally, the coherence of the boundary of safe basin of the ship, obtained by Lyapunov function, with the numerically determined safe basin is presented for two ships and three sea states.

MATHEMATICAL MODEL

While establishing the mathematical model, the couplings between the roll motion and other modes of ship motion are ignored to make the equation of roll motion simpler [5–9]. This assumption is based on the idea that roll motion has a greater influence on the ship stability in beam seas rather than the other modes of ship motion. Another reason for this simplification are the difficulties encountered when the complete hydrodynamic forces are accurately determined [15]. Although the coupling between the roll and sway motions is strong, it is possible to reduce one DOF by defining a virtual roll centre as indicated in the studies of Jiang [14], Hutchison [12] and Balcer [1].

The single degree of freedom (SDOF) roll motion equation in random beam seas can be represented by the equation (1) [5–8].

$$I(\tilde{\omega}) \ddot{\phi}(t) + B_{44}(\tilde{\omega}) \dot{\phi}(t) + B_{44q}(\tilde{\omega}) \phi(t) + \Delta GZ(\phi) = M(t) \quad (1)$$

where ϕ is the rolling angle with respect to calm sea surface (rad), roll angular velocity (rad/s), I denotes the virtual mass moment of inertia including the added mass moment in roll, $B_{44}(\tilde{\omega})$ and $B_{44q}(\tilde{\omega})$ are the linear and quadratic damping

coefficients, respectively, Δ is the displacement of the ship, ω is the wave circular frequency, GZ is the righting arm as a function of the roll angle which can be defined by a single cubic polynomial and $M(t)$ is the external random wave excitation moment described by the spectrum $S_{mm}(\omega)$. The excitation moment spectrum is related to the wave energy spectrum by the relationship shown in Eq. (2).

$$S_{mm}(\omega) = |F_{roll}(\omega)| S_{\xi\xi}(\omega) \quad (2)$$

where $|F_{roll}(\omega)|$ represents amplitude of the moment of the roll motion per unit wave height at frequency ω and $S_{\xi\xi}(\omega)$ is the wave energy spectrum [5–9].

The equation (3) is the spectrum of the relative wave excitation moment $S_{mm}(\omega)$ generated by a second-order linear filter shown in equation (4) and (5) [5–9].

$$S_{mm}(\omega) = \frac{1}{2\pi} \frac{\gamma^2}{(\alpha - \omega^2)^2 + (\beta\omega)^2} \quad (3)$$

$$dx_3 = (x_4 - \beta x_3) dt + \gamma dW \quad (4)$$

$$dx_4 = -\alpha x_4 dt \quad (5)$$

where x_3 and x_4 are the state variables in filter equation with x_3 representing the output term $m(t)$, $dW(t) = W(t+dt) - W(t)$ represents an infinitesimal increment of a standard Wiener process, α , β and γ are the parameters of the linear filter [5–9].

With the aid of linear filtering technique, the roll motion equation (1) is described by the following four dimensional state space equations (6–9) [5–8].

$$dx_1 = x_2 dt \quad (6)$$

$$dx_2 = (-b_{44}x_2 - b_{44q}x_2 | x_2 | - c_1x_1 + c_3x_1^3 + x_3) dt \quad (7)$$

$$dx_3 = (x_4 - \beta x_3) dt + \gamma dW \quad (8)$$

$$dx_4 = -\alpha x_4 dt \quad (9)$$

Where x_1 is the roll angle $\phi(t)$, x_2 is the roll angular velocity $x_2 = \dot{\phi}(t)$, x_3 is the ratio of the external random wave excitation moment and the virtual mass moment of inertia $x_3 = M(t)/I$, the damping moment coefficients b_{44} and b_{44q} are equal to B_{44}/I and B_{44q}/I , respectively, the righting arm coefficients c_1 and c_3 are equal to $\Delta GM/I$, and $-\Delta GM/(I\phi_v^2) = c_1/\phi_v^2$, respectively.

LYAPUNOV FUNCTION OF RANDOM PROCESS

Let the $dx = f(x,t)dt + \sigma(x,t)dz$ be the stochastic differential (Ito) equation.

In order to derive a Lyapunov function, $V(x)$, the following assumptions are made [16]:

- $V(x)$ should be a non-negative and continuous function, satisfying $V(0) = 0$, $V(x) > 0$ at $x \neq 0$
- $V(x)$ should have continuous first partial derivatives in $Q_m \equiv \{x: V(x) < m\}$ $m < \infty$.

When the derivative of Lyapunov function $L V(x)$ is smaller and equal to a continuous positive function $k(x)$, the system is stable.

The differential generator of the random process is given by the following equation [16, 25]:

$$L = \sum_i f_i(x, t) \frac{\partial}{\partial x_i} + \frac{1}{2} \sum_{i,j} S_{i,j}(x, t) \frac{\partial^2}{\partial x_i \partial x_j} \quad (10)$$

where $S(x) = \{S_{ij}(x)\} = \sigma'(x) \sigma(x)$

CONSTRUCTION OF LYAPUNOV FUNCTION OF RANDOM ROLL MOTION OF A SHIP

In this section the determination of analytical safe basin for forced non-linear rolling motion by using Lyapunov function is presented. Firstly, a positive analytical function is determined [4, 21–22, 25, 28–29]. Secondly, the derivative of this analytical function is obtained. When the derivative of this analytical function is negative, the ship is assumed to be stable [28].

The positive analytical function, Lyapunov function of the equation system (6–9), is assumed as the expression given in equation (11).

$$V = (1 + k_3 x_3^2 + k_4 x_4^2) \frac{x_2^2}{2} + k_1 \frac{x_1^2}{2} \quad (11)$$

The above given function is non-negative continuous and satisfying $V(0) = 0$ and $V(x) > 0$ at $x \neq 0$ and also has continuous first partial derivatives.

By using the differential generator (10), the derivative of the Lyapunov function is found as:

$$\begin{aligned} LV = & (1 + k_3 x_3^2 + k_4 x_4^2) (-b_{44} x_2^2 - b_{44q} |x_2| x_2^2 - c_1 x_1 x_2 \\ & + c_3 x_1^3 x_2 + x_3 x_2) + k_1 x_1 x_2 + k_3 x_3 x_4 x_2^2 - k_3 \beta x_2^2 x_3^2 \\ & + \frac{\gamma^2}{2} k_3 x_2^2 - \alpha x_3 x_4 k_4 x_2^2 \end{aligned} \quad (12)$$

When the coefficient k_3 is assumed equal to αk_4 , the equation (12) is simplified and the following expression is obtained:

$$\begin{aligned} LV = & (1 + k_3 x_3^2 + k_4 x_4^2) (-b_{44} x_2^2 - b_{44q} |x_2| x_2^2 - c_1 x_1 x_2 \\ & + c_3 x_1^3 x_2 + x_3 x_2) + k_1 x_1 x_2 - k_3 x_2^2 (\beta x_3^2 - \frac{\gamma^2}{2}) \end{aligned} \quad (13)$$

Let $1 + k_3 x_3^2 + k_4 x_4^2$ be smaller than any positive real number K smaller than infinity. On this assumption and regrouping the parentheses the equation (13) turns into the

equation (14). When the expression given by the equation (14) is smaller and equal to zero, the system is stable.

$$\begin{aligned} LV = & K (-x_2^2 (b_{44} + b_{44q} |x_2|) - x_2 (c_1 x_1 - c_3 x_1^3 - x_3)) \\ & + k_1 x_1 x_2 - k_3 x_2^2 (\beta x_3^2 - \frac{\gamma^2}{2}) \leq 0 \end{aligned} \quad (14)$$

When the both sides of the above given equation is divided by K positive constant and after regrouping the parentheses, the following expression is obtained:

$$\begin{aligned} -x_2^2 (b_{44} + b_{44q} |x_2|) - x_2 ((c_1 - k_1^*) x_1 - c_3 x_1^3 - x_3) \\ - k_3 x_2^2 (\beta x_3^2 - \frac{\gamma^2}{2}) \leq 0 \end{aligned} \quad (15)$$

where $k_1^* = k_1/K$ and $k_3^* = k_3/K$

Let's assume x_{3m} is the greatest value of x_3 and put into the equation (15) in the place of x_3 . Then, the equation (15) turns into the equation (16).

$$\begin{aligned} -x_2^2 (b_{44} + b_{44q} |x_2|) - x_2 ((c_1 - k_1^*) x_1 - c_3 x_1^3 - x_{3m}) \\ - k_3^* x_2^2 (\beta x_{3m}^2 - \frac{\gamma^2}{2}) = 0 \end{aligned} \quad (16)$$

After regrouping parentheses and dividing both sides of the equation (16) by x_2 , the equation (17) is obtained.

$$\begin{aligned} x_2 (b_{44} + b_{44q} |x_2| + k_3^* (\beta x_{3m}^2 - \frac{\gamma^2}{2})) \\ = [x_{3m} - ((c_1 - k_1^*) x_1 - c_3 x_1^3)] \end{aligned} \quad (17)$$

When the above given condition is satisfied, the ship can be assumed stable. Hence, the two unknown parameters of the equation (17), k_1^* and k_3^* , should be determined. The determination of the parameters is explained in the next section.

LYAPUNOV FUNCTION BASED CRITERIA

The graphical representation of the right hand side of the equation (17) is shown in Fig. 1.

In the figure, $x_{1st}(\phi_{st})$ is the static heel angle which is represented by the intersection point of the line of maximum value of the external excitation x_{3m} and the modified restoring arm curve ($gz^* = (c_1 - k_1^*) x_1 - c_3 x_1^3$). According to the weather criteria for German naval vessels, $x_{1ref}(\phi_{ref})$, the reference angle and h_{res} , the residual arm between the restoring and the excitation moment are determined by means of the equation (18) or (19) [2].

$$\phi_{ref} = 35^\circ \text{ and } h_{res} = 0.1 \text{ m for } \phi_{st} \leq 15^\circ \quad (18)$$

$$\phi_{ref} = 2 \times \phi_{st} + 5^\circ \text{ and } h_{res} = 0.01 \times \phi_{st} - 0.05, \phi_{st} > 15^\circ \quad (19)$$

where both ϕ_{st} and ϕ_{ref} are expressed in degrees.

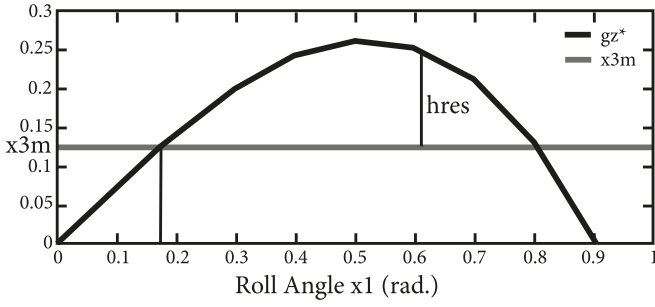


Fig. 1. Modified restoring arm curve with external excitation

The unknown parameters k_1^* and k_3^* are determined by the numerical solution of the system of the equations (20)–(25) which are derived by making the following assumptions:

- x_{1st} is the intersection point of the modified gz curve and the maximum external excitation lever x_{3m} determined by the equation (20).
- The roll angular velocity x_2 gets its highest value (x_{2m}) when the roll angle is zero. Then, the equation (21) is obtained by putting x_{2m} and 0 instead of x_2 and x_1 , respectively, in the equation (17).
- It is assumed that the ship must have the half of the maximum roll angular velocity (x_{2m}) at the reference angle of heel (x_{1ref}). Then, the equation (22) is obtained by putting ($x_{2m}/2$) and x_{1ref} instead of x_2 and x_1 , respectively, in the equation (17).
- In the equation (23), it is stated that the ship must have the residual arm h_{res} at the roll angle x_a . The value of h_{res} is determined by the following condition:
 $x_{1st} \leq 15^\circ$ then $h_{res} = 0.01$
 $x_{1st} > 15^\circ$ then $h_{res} = 0.01 x_{1st} - 0.05$.
- The equation (24) shows that the coefficient k_1^* depends on x_{2m} and x_b and is obtained by dividing the equation (11) by K constant and assuming that the energy on the boundary is equal to $(x_{2m}^2/2)$ and the width of safe basin is x_b .
- The width of the safe basin (x_b) is assumed to be equal to the expression represented by the equation (25). When x_a and x_{1st} get higher values, the width of safe basin decreases.

$$(c_1 - k_1^*) x_{1st} - c_3 x_{1st}^3 - x_{3m} = 0 \quad (20)$$

$$-x_{2m} (b_{44} + b_{44q} |x_{2m}|) - x_{3m} - k_3^* x_{2m} (\beta x_{3m}^2 - \frac{\gamma^2}{2}) = 0 \quad (21)$$

$$\frac{x_{2m}}{2} (b_{44} + b_{44q} |\frac{x_{2m}}{2}| + k_3^* (\beta x_{3m}^2 - \frac{\gamma^2}{2})) \quad (22)$$

$$- [x_{3m} - ((c_1 - k_1^*) x_{1ref} - c_3 x_{1ref}^3)] = 0$$

$$(c_1 - k_1^*) x_a - c_3 x_a^3 - x_{3m} - h_{res} = 0 \quad (23)$$

$$k_1^* = (x_{2m}/x_b)^2 \quad (24)$$

$$x_b = 0.8 x_v - x_{1st} - x_a \quad (25)$$

here x_v is the vanishing stability angle, the coefficients k_1^* and k_3^* should be positive.

The input values to the above equation system are the restoring and damping coefficients, second order linear filter parameters and the maximum external excitation value x_{3m} . The output of the equation system is x_{1st} , x_{2m} , x_a and k_3^* . It is also possible to easily obtain x_b by putting the values of x_{1st} and x_a into the equation (25).

Whether the ship has a safe region or not can easily be understood by looking at the values x_{2m} and x_b .

DATA FOR ROLLING MOTION EQUATION

In this study, the data of a fishery research vessel [6] is used to test the criteria based on Lyapunov function. The main parameters of the ship model are given in Tab. 1.

Tab. 1. List of ship parameters

I	$5540 \times 10^7 \text{ kg m}^2$
Δ	$2017 \times 10^7 \text{ N}$
b_{44}	0.095 s^{-1}
b_{44q}	0.0519
c_1	1.153 s^{-2}
c_3	0.915 s^{-2}
ω_0	1.074 rad/s
x_v	1.1 rad

The parameters α , β and γ in the second order linear filter equation (4) and (5) are presented in Tab. 2 [6].

Tab. 2. List of second order linear filter parameters

Sea States	H_s (m)	T_p (s)	α	β	γ
Sea State 1	4.0	11.0	0.495	0.366	0.0432
Sea State 2	5.0	12.0	0.441	0.364	0.0498
Sea State 3	6.0	13.0	0.390	0.365	0.0555

RESULTS

In this section, for three sea states [6], the safe basins of roll motion of the fishery vessel are obtained from both the numerical solutions of the equation system (6)–(9) and the equation system (20)–(25) created by means of Lyapunov Direct Method. Then, the safe basins of roll motion of the fishery vessel, obtained in different ways, are compared.

Firstly, the equation system (20)–(25) are numerically solved with different initial conditions of x_{2m} , x_a and x_{3m} .

The output of the equation system (20)–(25) for the fishery vessel is presented for different initial conditions in Tab. 3–6 for Sea state 1 and Tab. 7–8 for Sea state 3. In each table, the highest values of x_{2m} and x_b which gives the largest safe basin are marked bold.

Tab. 3. The outputs for Sea state 1 with the initial values of $x_{1st} = 0.1$, $k_3=0.2$, $x_a = 0.5$ and $x_{3m} = \gamma / (2\alpha\sqrt{2\beta})$

Initial x_{2m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
0.1	0.126	0.301	0.397	0.357
0.2	0.119	0.308	0.397	0.364
0.3	0.114	0.312	0.397	0.369
0.4	0.104	0.322	0.396	0.380
0.5	0.119	0.311	0.395	0.366
0.6	0.108	0.326	0.388	0.384
0.7	0.106	0.323	0.394	0.380
0.8	0.122	0.311	0.392	0.366
0.9	0.121	0.312	0.393	0.366
1.0	0.114	0.318	0.394	0.373

Tab. 6. The outputs for Sea state 1 with the initial values of $x_{1st} = 0.1$, $k_3=0.2$, $x_a = 0.75$ and $x_{3m} = \gamma / (\alpha\sqrt{2\beta})$

Initial x_{2m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
0.1	0.182	0.210	0.433	0.265
0.2	0.191	0.207	0.431	0.259
0.3	0.191	0.204	0.432	0.257
0.4	0.168	0.219	0.436	0.276
0.5	0.176	0.210	0.439	0.265
0.6	0.173	0.211	0.440	0.266
0.7	0.178	0.212	0.435	0.267
0.8	0.199	0.198	0.433	0.248
0.9	0.161	0.229	0.431	0.288
1.0	0.193	0.204	0.431	0.256

Tab. 4. The outputs for Sea state 1 with the initial values of $x_{1st} = 0.1$, $k_3 = 0.2$, $x_a = 0.75$ and $x_{3m} = \gamma / (2\alpha\sqrt{2\beta})$

Initial x_{2m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
0.1	0.131	0.304	0.393	0.356
0.2	0.105	0.323	0.394	0.381
0.3	0.108	0.320	0.395	0.377
0.4	0.114	0.312	0.397	0.369
0.5	0.121	0.309	0.395	0.364
0.6	0.119	0.310	0.395	0.366
0.7	0.122	0.308	0.394	0.363
0.8	0.123	0.308	0.394	0.363
0.9	0.123	0.309	0.394	0.364
1.0	0.125	0.303	0.399	0.356

Tab. 7. The outputs for Sea state 3 with the initial values of $x_{1st} = 0.1$, $k_3 = 0.2$, $x_a = 0.5$ and $x_{3m} = \gamma / (2\alpha\sqrt{2\beta})$

Initial x_{2m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
0.1	0.165	0.234	0.425	0.289
0.2	0.169	0.233	0.423	0.288
0.3	0.162	0.236	0.426	0.292
0.4	0.158	0.243	0.423	0.299
0.5	0.155	0.246	0.423	0.302
0.6	0.154	0.247	0.422	0.304
0.7	0.167	0.238	0.421	0.292
0.8	0.174	0.235	0.419	0.287
0.9	0.173	0.235	0.419	0.288
1.0	0.173	0.235	0.419	0.288

Tab. 5. The outputs for Sea state 1 with the initial values of $x_{1st} = 0.1$, $k_3=0.2$, $x_a = 0.5$ and $x_{3m} = \gamma / (\alpha\sqrt{2\beta})$

Initial x_{2m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
0.1	0.178	0.203	0.443	0.259
0.2	0.182	0.203	0.441	0.257
0.3	0.185	0.206	0.434	0.261
0.4	0.171	0.214	0.437	0.272
0.5	0.182	0.209	0.434	0.264
0.6	0.174	0.213	0.436	0.270
0.7	0.182	0.210	0.433	0.264
0.8	0.180	0.210	0.436	0.264
0.9	0.193	0.206	0.429	0.258
1.0	0.193	0.201	0.434	0.253

Tab. 8. The outputs for Sea state 3 with the initial values of $x_{1st} = 0.1$, $k_3=0.2$, $x_a = 0.75$ and $x_{3m} = \gamma / (2\alpha\sqrt{2\beta})$

Initial x_{2m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
0.1	0.177	0.234	0.417	0.285
0.2	0.200	0.218	0.415	0.265
0.3	0.170	0.238	0.419	0.292
0.4	0.169	0.238	0.420	0.292
0.5	0.152	0.251	0.420	0.308
0.6	0.157	0.244	0.423	0.301
0.7	0.176	0.233	0.419	0.285
0.8	0.177	0.232	0.419	0.285
0.9	0.167	0.239	0.420	0.293
1.0	0.158	0.246	0.420	0.302

The highest values of x_{2m} and x_b are presented for different maximum excitation levers (x_{3m}) in Tab. 9–14 for Sea state 1, Sea state 2 and 3, respectively. As can be seen from the tables, the percentage difference between the highest values of x_{2m} and x_b obtained by using the initial value of $x_a = 0.5$ and $x_a = 0.75$ is less than 2. The solution of the equation system shows the same characteristics for different initial conditions.

The size of the safe basins is highly dependent on the selection of the value of x_{3m} which is the greatest value of x_3 (the ratio of the external random wave excitation moment and the virtual mass moment of inertia). Selecting small value of x_{3m} results in not representing of sea state and also that the safe basin is greater than expected whereas selecting bigger value of x_{3m} causes safe basin smaller than expected.

While comparing the safe basins obtained by the numerical solutions of the equation system (3)–(6) and equation system (19)–(25), the value of x_{3m} is assumed equal to $\gamma / (2\alpha\sqrt{2\beta})$. The values of x_{2m} and x_b used for obtaining the safe basins are presented in Tab. 15.

Tab. 9. The highest values of x_{2m} and x_b for Sea state 1 with the initial values of $x_{1st} = 0.1$, $k_3 = 0.2$ and $x_a = 0.5$

x_{3m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
$\gamma/(3\alpha\sqrt{2\beta})$	0.062	0.383	0.377	0.441
$\gamma/(2\alpha\sqrt{2\beta})$	0.108	0.326	0.388	0.384
$\gamma/(\alpha\sqrt{2\beta})$	0.171	0.214	0.437	0.272
$3\gamma/(2\alpha\sqrt{2\beta})$	0.199	0.156	0.467	0.213

Tab. 10. The highest values of x_{2m} and x_b for Sea state 1 with the initial values of $x_{1st} = 0.1$, $k_3 = 0.2$ and $x_a = 0.75$

x_{3m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
$\gamma/(3\alpha\sqrt{2\beta})$	0.064	0.375	0.382	0.434
$\gamma/(2\alpha\sqrt{2\beta})$	0.105	0.323	0.394	0.381
$\gamma/(\alpha\sqrt{2\beta})$	0.161	0.229	0.431	0.288
$3\gamma/(2\alpha\sqrt{2\beta})$	0.208	0.145	0.474	0.198

Tab. 11. The highest values of x_{2m} and x_b for Sea state 2 with the initial values of $x_{1st} = 0.1$, $k_3 = 0.2$ and $x_a = 0.5$

x_{3m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
$\gamma/(3\alpha\sqrt{2\beta})$	0.083	0.355	0.383	0.414
$\gamma/(2\alpha\sqrt{2\beta})$	0.115	0.291	0.413	0.352
$\gamma/(\alpha\sqrt{2\beta})$	0.182	0.183	0.457	0.241
$3\gamma/(2\alpha\sqrt{2\beta})$	No Region for some initial conditions ($x_{2m} = 0.8$)			

The boundary of the analytical safe basin is determined by Eq. (26).

$$x_2 = x_{2m} \sqrt{1 - \left(\frac{x_1}{x_b}\right)^2}, \quad x_1 \in [0, x_b] \quad (26)$$

Secondly, the initial condition for rolling is selected by defining the bounded area (A_B) as follows:

$$A_B = \{(x_1, x_2): 0 \leq x_1 \leq 1, 0 \leq x_2 \leq 1\} \quad (27)$$

where A_B is divided into the mesh of 58×58 points which are taken as the initial values for the solutions of the four-dimensional state space equations (6–9).

The equation system of rolling motion in random beam seas are numerically integrated by using the Euler Maruyama (EM) method [17] for different initial conditions as defined in Eq. (27) in order to investigate existence of a safe basin until either the roll angle exceeds a capsizing criterion reaching the point where the ship is assumed to capsize or the simulation end time (equal to 3000s in this study) is reached, in which it is assumed that the ship will remain upright [15, 19, 23, 26–28].

Tab. 12. The highest values of x_{2m} and x_b for Sea state 2 with the initial values of $x_{1st} = 0.1$, $k_3 = 0.2$ and $x_a = 0.75$

x_{3m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
$\gamma/(3\alpha\sqrt{2\beta})$	0.082	0.346	0.394	0.404
$\gamma/(2\alpha\sqrt{2\beta})$	0.112	0.299	0.410	0.358
$\gamma/(\alpha\sqrt{2\beta})$	0.190	0.176	0.458	0.232
$3\gamma/(2\alpha\sqrt{2\beta})$	No Region for some initial conditions ($x_{2m} = 0.7$)			

Tab. 13. The highest values of x_{2m} and x_b for Sea state 3 with the initial values of $x_{1st} = 0.1$, $k_3 = 0.2$ and $x_a = 0.5$

x_{3m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
$\gamma/(3\alpha\sqrt{2\beta})$	0.100	0.327	0.393	0.387
$\gamma/(2\alpha\sqrt{2\beta})$	0.154	0.247	0.422	0.304
$\gamma/(\alpha\sqrt{2\beta})$	0.216	0.138	0.473	0.192
$3\gamma/(2\alpha\sqrt{2\beta})$	No Region for some initial conditions ($x_{2m} = 0.8$)			

Tab. 14. The highest values of x_{2m} and x_b for Sea state 3 with the initial values of $x_{1st} = 0.1$, $k_3 = 0.2$ and $x_a = 0.75$

x_{3m}	x_{1st} (rad)	x_{2m} (rad/s)	x_a (rad)	x_b (rad)
$\gamma/(3\alpha\sqrt{2\beta})$	0.104	0.319	0.399	0.376
$\gamma/(2\alpha\sqrt{2\beta})$	0.152	0.251	0.420	0.308
$\gamma/(\alpha\sqrt{2\beta})$	0.213	0.134	0.481	0.186
$3\gamma/(2\alpha\sqrt{2\beta})$	No Region for some initial conditions ($x_{2m} = 0.8$)			

Safe basin is a set of initial conditions defined in the space of roll angle and roll angular phase [15, 19, 23, 26–28]. The safe initial conditions which are represented by white points do not cause the ship to capsize, whereas unsafe initial conditions leading to capsizing of the ship are represented by black points [15, 23, 26–28].

The numerically and analytically obtained safe basins of the ship are shown in Figs. 2–4. In the figures the analytically determined boundaries are represented by a black line and the black points are the unsafe initial conditions. As can be seen from these figures, the number of the initial conditions causing the ship to capsize rapidly increases by the increment of sea state and also the analytically obtained safe basin appears smaller. It can be deduced from these figures that the boundary of safe basin obtained by Lyapunov’s function is coherent with the numerical results, though more conservative.

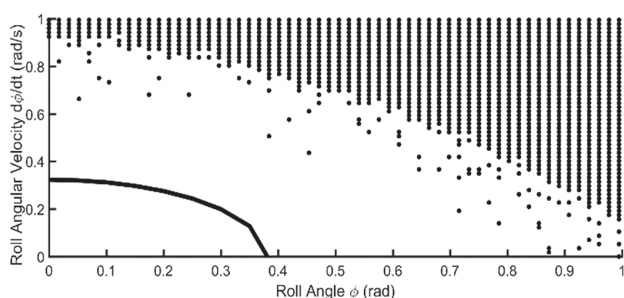


Fig. 2. Boundary of safe basin for Ship 1 and Sea state 1

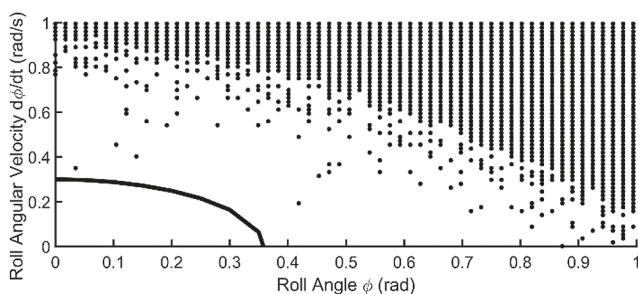


Fig. 3. Boundary of safe basin for Ship 1 and Sea state 2

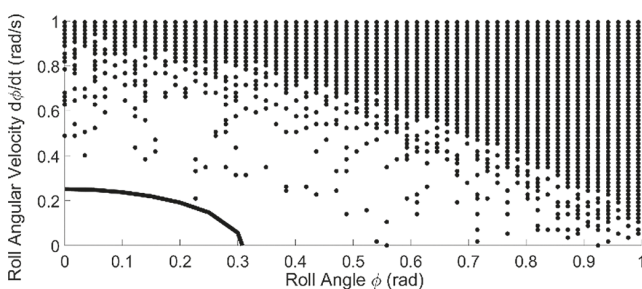


Fig. 4. Boundary of safe basin for Ship 1 and Sea state 3

CONCLUSIONS

In this study, the Lyapunov function is derived for the 4D system describing the roll motion in beam seas. The Lyapunov function is derived under the following assumptions:

- x_{1sf} is the intersection point of modified restoring arm and maximum value of external excitation arm.
- The roll angular velocity reaches its highest value (x_{2m}) when the roll angle is zero.
- The ship must have the half of the maximum roll angular velocity at the reference angle of heel determined by x_{1sf} .
- The ship must have a residual arm of h_{res} at the roll angle x_a . The magnitude of h_{res} is determined by x_{1sf} .

The Lyapunov function is derived by the maximum roll angular velocity (x_{2m}) and the width of safe basin (x_b). Values of x_{2m} and x_b are obtained from the solution of the equation system (20)–(25).

The necessary parameters of the equation system are: the restoring moment coefficients (c_1, c_3), damping moment coefficients (b_{44}, b_{44q}), linear filter parameters (α, β, γ), the greatest value of the ratio of the external random wave excitation moment and the virtual mass moment of inertia (x_{3m}), as well as initial values of x_2, x_{1sf}, k_3^* and x_a . The way of selection of x_{3m} and initial values of x_2, x_{1sf}, k_3^* and x_a is explained in Section 5.

With the existence and size of the safe basin obtained by Lyapunov function, it is possible to define whether the ship is stable or not in an examined sea state.

From the results of this study it can be concluded that the existence and size of the safe basin obtained by Lyapunov function can be used to derive an intact stability criterion to define a rule for the intact stability of ships.

REFERENCES

1. Balcer L.: *Location of ship rolling axis*, Polish Maritime Research, vol. 11, no. 1, pp. 3–7, 2004.
2. Biran, A. B.: *Ship Hydrostatics and stability*. Butterworth-Heinemann, Oxford, 2003.
3. Belenky, V. L. and N. B. Sevastianov *Stability and Safety of Ships: Risk of Capsizing* (2nd ed), SNAME, Jersey City, 2007.
4. Caldeira-Sariava, F.: *The boundedness of solutions of a Leinard Equation arising in the theory of ship rolling*. IMA J. Appl. Math, 36, pp. 126–139.
5. Chai W., Naess A. and Leira B. J.: *Filter models for prediction of stochastic ship roll response*, Probab. Eng. Mech., 41, pp. 104–114, 2015.
6. Chai W., Naess A., and Leira B. J.: *Stochastic dynamic analysis and reliability of a vessel rolling in random beam seas*, J. Ship Res., 59(2), pp. 113–131, 2015.
7. Chai W., Naess A. and Leira B. J.: *Stochastic nonlinear ship rolling in random beam seas by the path integration method*, Probab. Eng. Mech., 44, pp. 43–52, 2016.
8. Chai W., Naess A. and Leira B. J.: *Long-term extreme response*

- and reliability of a vessel rolling in random beam sea*, J. Offshore Mech. and Arctic Eng., 140, 11601, pp. 1–9, 2018.
9. Dostal L. and Kreuzer E.: *Probabilistic approach to large amplitude ship rolling in random seas*, Proceedings of the Institution of Mechanical Engineers. Part C, Journal of Mechanical Engineering Science, 225, pp. 2464–2476, 2011.
 10. Dostal L., Kreuzer E. and Namachchivaya: *Non-standard stochastic averaging of large-amplitude ship rolling in random seas*, Proceedings of the Royal Society A, 258, pp. 1–25, 2012.
 11. Haddara M.: *Modified approach for the application of Fokker – Plank equation to the nonlinear ship motions in random waves*. Int. Shipbuilding Prog., 21(242), pp. 283–288, 1974.
 12. Hutchison B. L.: *The transverse plane motions of ships*, SNAME Marine Tech., vol. 28, No. 2, pp. 55–72, 1991.
 13. Jiang C., Troesch A. and Shaw, S.: *Capsize criteria for ship models with Memory-Dependent Hydrodynamics and Random Excitation*, Philos. Trans. R. Soc. Lond. Ser. A, 358(1771), pp. 1761–1791, 2000.
 14. Jiang C.: *Highly nonlinear rolling motion leading to capsizing*, University of Michigan, Ann Arbor, 1995.
 15. Karakas S. C., Pesman E. and Ucer E.: *Control design of fin roll stabilization in beam seas based on Lyapunov's direct method*, Polish Maritime Research, No 2(73) Vol. 19, pp. 25–30, 2012.
 16. Kushner H. J.: *Stochastic stability and control*, Academic Press, New York, 1967.
 17. Kloden PE, Platen E: *Numerical solution of stochastic differential equations*. New York: Springer; 1995.
 18. La Salle, J.P. and Lefschetz, S.: 1961. *Stability by Lyapunov's Direct Method with Applications*. Academic Press, New York.
 19. Long, Z.Z., Lee, S.K., Kim, J.Y.: *Estimation of survival probability for a ship in beam seas using the safe basin*, Ocean Eng. Vol: 37, 418–424, 2010.
 20. Moshchuk N., Ibrahim R. A. and Khazminskii R.: *Response statistics of ocean structures to nonlinear hydrodynamics loading Part I: Gaussian ocean waves*, Journal of Sound and Vibration, 184(4), pp. 681–701, 1995.
 21. Odabasi, A.Y.: *Stochastic stability of ships in following seas*, Schiff & Hafen, 3, pp. 223–226, 1979.
 22. Ozkan, I.R.: *Total (practical) Stability of ships*, Ocean Eng., 8, pp. 551–598.
 23. Rainey, R.C.T., Thompson, J.M.T.: *The transient capsizing diagram- a new method of quantifying stability analysis*. J. Ship Res. 35 (1), pp. 58–92. 1991.
 24. Roberts J.: *A Stochastic Theory for Nonlinear Ship Rolling in Irregular Seas*, J. Ship Res., 26(4), pp. 229–245, 1982.
 25. Schurz H.: *Verification of Lyapunov functions for the analysis of stochastic Lienard equations*. J Sound Vib., 325: pp. 938–49, 2009.
 26. Soliman, M.S., Thompson, J.M.T.: *Transient and steady state analysis of capsizing phenomena*. Appl. Ocean Res. 13 (2), 82–92, 1991.
 27. Thompson, J.M.T.: *Loss of engineering integrity due to the erosion of absolute and transient basin boundaries*, Proceedings of IUTAM Symposium on the Dynamics of Marine Vehicles and Structures in Waves, pp. 313–320, 1989.
 28. Ucer E.: *Examination of the trawlers in beam seas using safe basins*, Ocean Eng., 38(17-18), pp. 1908–1915, 2011.
 29. Yilmaz H.: *Analyzing form parameters of fishing vessels point of view of practical stability criteria in preliminary design stage*, Yildiz Technical University, Istanbul, 1998.

CONTACT WITH THE AUTHORS

Erdem Üçer

e-mail: ucerer@itu.edu.tr

Istanbul Technical University
Faculty of Naval Architecture and Ocean Engineering
Ayazaga Campus, 34469 Istanbul
TURKEY